


SECTIONALISER / LOAD BREAK SWITCH


- It is the Automated circuit breaker designed for the aim of unmanned substation and feeder automations up to 33kV.
- Designed for fault section isolation so that fault location identification.
- Upon sensing of fault in a feeder, it works in coordination with the upstream Auto Recloser. Upon the fault count it isolates the faulty section.
- In built communication and remote control capabilities makes use this device in SCADA and DAS systems with latest protocols like IEC – 60870-5-101/104, DNP etc.

SECTIONALISER

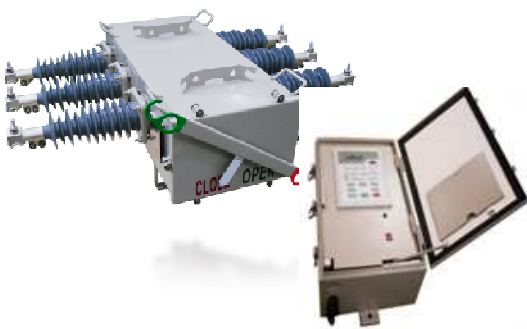

Model name	PNC-RC-15	PNC-RC-25	PNC-RC-36
Type	SF6 Gas Insulated		
Rated Voltage	12(15)KV	24(25)KV	36(38)KV
Rated current	400/630 A		
Rated lightning impulse withstand voltage(1.2x50ms)	110KV	150 KV	170KV
Rated short circuit current(RMS)	12.5/16KA/20KA		

FEEDER TERMINAL UNIT-P200

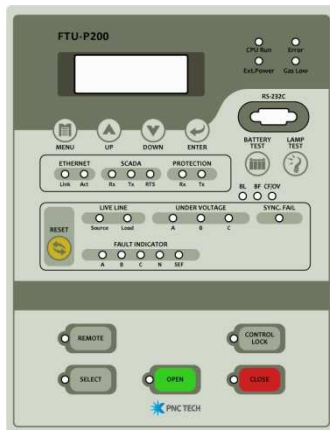

FEEDER TERMINAL UNIT-P200

Model name	FTU –R200
Fault Detection & Protection	Phase fault, Earth fault, SEF Sectionalizing
Measurement	V, A, WAR, VAR, Hz, THD
Power Quality monitoring	Voltage unbalance, current unbalance sag, swell, interruption
Communication	DNP3.0,DNP3.0over TCP/IP, IEC60870-5-101/104

APPLICATION

Distribution Feeder Automation for 11kV and 33kV

PRODUCT CREDENTIALS

Type Tested at KERI

INDIA CLIENTS

APCPDCL – Andhra Pradesh Central Power Distribution Company Limited
BESCOM – Bangalore Electricity Supply Company Limited

INTERNATIONAL CLIENTS

KOREA, UAE, SAUDI ARABIA, USA, MYNMAR, OMAN, AUSTRALIA, SINGAPORE, BAHRAIN, UK, NEPAN,QATAR, MALAYSIA, SOUTH AFRICA, PHILIPPINES, SRILANKA



INE VALUE CREATORS & CONSULTANTS (P) LTD

A-12,VIKRAMPURI, KHARKHANA, SECUNDERABAD-500 009, Ph:040-27844431/33

Fax:040-27844432 URL:www.inev.in

Mail us @ : info@inev.in , ine_value@yahoo.co.in , inevalueindia@gmail.com

Contact us @ : 09052277110, 08498868877